

'Golden Pin'® - Anchor Shackles

Meeting the performance requirements of:

U.S. Fed. Specs RR-C-271D, Type IV A, grade A, Class 2.

ASME B30.26

Premium Load Rated shackles


Pin and Bow are galvanized

Pin is then Gold Chromated

Quenched and tempered, and can meet DNV impact requirements of 42 joules (31ft.lbs) at -20 degrees C (-4 degrees F).



Size	Pin Diameter	Dimension Inches				WLL (Tons)	Weight (lbs)	Product Code
		A	B	C	D			
3/16"	1/4"	0.93	0.39	0.59	0.64	1/3	0.06	29020012
1/4"	5/16"	1.14	0.49	0.70	0.75	1/2	0.12	29020016
5/16"	3/8"	1.23	0.53	0.83	0.80	3/4	0.18	29020020
3/8"	7/16"	1.41	0.69	0.98	1.01	1	0.32	29020024
7/16"	1/2"	1.70	0.72	1.06	1.13	1-1/2	0.45	29020028
1/2"	5/8"	1.83	0.83	1.18	1.25	2	0.68	29020032
5/8"	3/4"	2.36	1.06	1.55	1.67	3-1/4	1.36	29020040
3/4"	7/8"	2.76	1.24	1.78	1.98	4-3/4	2.24	29020048
7/8"	1"	3.29	1.42	2.09	2.25	6-1/2	3.50	29020056
1"	1-1/8"	3.69	1.75	2.35	2.66	8-1/2	5.00	29020100
1-1/8"	1-1/4"	4.23	1.80	2.71	2.79	9-1/2	7.65	29020108
1-1/4"	1-3/8"	4.63	2.12	3.01	3.15	12	10.40	29020116
1-3/8"	1-1/2"	5.17	2.30	3.32	3.60	13-1/2	13.80	29020124
1-1/2"	1-5/8"	5.67	2.39	3.63	3.85	17	17.90	29020132
1-3/4"	2"	7.06	2.96	4.23	4.99	25	27.90	29020148
2"	2-1/4"	7.75	3.31	5.11	5.59	35	42.70	29020200
2-1/2"	2-3/4"	10.25	4.00	5.75	7.00	55	85.00	29020232

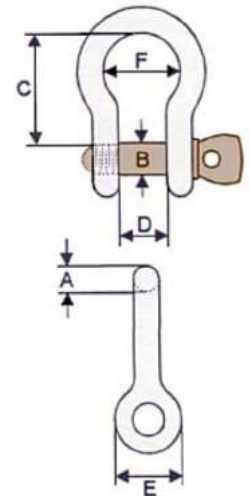

Safety Factor: 6

WARNING: If the pin, after a 1/4 turn, remains hard to remove, there is a good chance that the shackle has been overloaded beyond the designed working load limit (WLL) and it, therefore, must be discarded.